

Multi-criteria decision making approaches to select appropriate enhanced oil recovery techniques in petroleum industries

by Lis Yapanto

Submission date: 15-Feb-2023 08:49PM (UTC-0500)

Submission ID: 2015270897

File name: 1-s2.0-S2352484721002778-main_1.pdf (903.1K)

Word count: 7710

Character count: 40478



Research paper

Multi-criteria decision making approaches to select appropriate enhanced oil recovery techniques in petroleum industries

Zhenzhen Wei^{a,*}, Shanyu Zhu^b, Xiaodong Dai^a, Xuewu Wang^a, Lis M. Yapanto^c, Inzir Ramilevich Raupov^d^a College of Oil and Gas Engineering, Shandong Institute of Petroleum and Chemical Technology, Dongying, Shandong, 257061, China^b Petroleum Engineering Technology Research Institute, Shengli Oilfield of Sinopec, Dongying, Shandong, 257000, China^c Departement of Aquatic Management, Faculty of Fisheries And Marine Science, Universitas Negeri Gorontalo, Indonesia^d Development and Operation of Oil and Gas Fields, Oil and Gas Faculty, Saint Petersburg Mining University, Saint Petersburg, Russian Federation

ARTICLE INFO

Article history:

Received 1 April 2021

Received in revised form 25 April 2021

Accepted 3 May 2021

Available online 15 May 2021

Keywords:

Multi-criteria decision making

SAGD/WAG

FAHP

FTOPSIS

Hybrid injection

ABSTRACT

To select the optimum methods, such criteria like reservoir heterogeneity, reservoir pressure, reservoir temperature, crude oil type API (American Petroleum Institute), and brine salinity. EOR methods contained water flooding, chemical flooding, nanofluids injection, CO₂ (carbon dioxide) injection, SAGD/WAG (Surfactant assisted gas drainage/water alternative gas injection), and hybrid injection. Multi-criteria decision-making methods of FTOPSIS (a fuzzy technique for order preference by similarity to ideal solution) and FAHP (fuzzy analytic hierarchy process) were used to select the optimum in the EOR method. The hybrid injection is considered the preferable oil recovery enhancement method in both FTOPSIS and FAHP methods. It has a normalized weight of 74% and 23% for FTOPSIS and FAHP, respectively. In the FTOPSIS method, SAGD/WAG and CO₂ methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 65% and 56%, respectively. In the FAHP method, CO₂ and SAGD/WAG methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 19% and 14%.

© 2021 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

To overcome the enormous demands of various industries to crude oil supplements and their products, petroleum industries have developed and proposed novel techniques to increase the oil production rate (Zoback, 2007; Adham et al., 2018; Davarpanah et al., 2018; Yang et al., 2021; Bai et al., 2021; Jiang et al., 2018; Liu et al., 2020; Yang and Sowmya, 2015; Zhang et al., 2019a,b; Awan et al., 2020; Bafkar, 2020). Enhanced oil recovery methods consisted of primary, secondary, and tertiary techniques, depending on reservoir heterogeneity and characteristics (Salehi et al., 2008; Pande and Orr, 1994; Sun et al., 2013; Hu et al., 2020a; Chen et al., 2021; Zuo et al., 2015, 2017; Abedini and Zhang, 2020; Zhang et al., 2020a; Huang et al., 2020a). Primary enhanced oil recovery methods are considered conventional oil recovery methods requiring no special requirement and additional facilities to produce oil (Menad et al., 2019; Shokry and Tawfik, 2010; Khanamiri et al., 2015; Zhang et al., 2020b; Alam et al., 2021; Kazemi and Yang, 2021, 2019; Zheng et al., 2021a,b; Huang et al., 2020b). In these methods, oil has been produced by

natural mechanism drives and has been lasted until the wellhead pressure cannot provide sufficient energy to mobilize the oil from wellbores (Zhu et al., 2020a; Mao et al., 2019; Lin et al., 2020; Korolev et al., 2020; Davarpanah and Mirshekari, 2019d; Rabbani et al., 2018; Davarpanah, 2019). In this stage, it is recommended to implement secondary and tertiary EOR methods to improve oil production (Yang et al., 2015; Ma et al., 2021; Sabukevich et al., 2020; Palyanitsina and Sukhikh, 2020; Sun et al., 2020; Zhu et al., 2020b). These methods included chemical, thermal, and hybrid application of EOR methods (Zhang et al., 2021; Xue et al., 2020). Chemical flooding has contained foam, polymer, surfactant, alkaline, and nanoparticle flooding to improve oil recovery (Davarpanah, 2018; Davarpanah and Mirshekari, 2020; Davarpanah et al., 2019b). Foams can be applied in the flooding system to block the gas pathways, which helped increase the oil mobilization through porous media (Hu et al., 2020c; Lotfollahi et al., 2015; Sie and Nguyen, 2020; Rogachev et al., 2019; Galkin and Koltyrin, 2021). Surfactants are other helpful chemical agents to change the reservoir rocks' wettability that can be used as the preferable methods to enhance oil recovery (Nesic et al., 2020; Hu et al., 2020b; Valizadeh et al., 2019; Sepahvand et al., 2021; Jalali Sarvestani and Charehjou, 2021). It was experimentally investigated by different surfactant types to distinguish the

* Corresponding author.

E-mail address: scorpion090917@163.com (Z. Wei).

Table 1
Definitions of criteria and functions.

Criteria	Functions
Reservoir heterogeneity (C_1)	Water flooding
Reservoir pressure (C_2)	Chemical flooding
Reservoir temperature (C_3)	Nanofluids injection
Crude oil type (API) (C_4)	CO ₂ injection
Brine salinity (C_5)	SAGD/WAG
	Hybrid injection

efficiency of each surfactant on the wettability alteration (Esfandiyari et al., 2020c,a; Pan et al., 2020; Esfandiyari et al., 2020b; Jia et al., 2021; Maina et al., 2020; Nnaemeka, 2020; Nwankwo et al., 2020). Polymers are other types of chemical agents used in heavy oil reservoirs to improve oil mobilization through porous media (Davarpanah and Mirshekari, 2019a, 2018b; Ebadi et al., 2020; A. et al., 2020; Qayyum et al., 2020). It can be done by increasing the water viscosity, and therefore, oil can be mobilized more efficiently (Mandal, 2015; Brown et al., 1996; Maghzi et al., 2013; Ali et al., 2020; Davarpanah, 2020). As foams, polymers, and surfactants can be used in different EOR techniques simultaneously, they can be used as hybrid techniques in some particular circumstances. Thermal EOR methods are considered effective techniques, especially in tight and low permeable reservoirs with low oil production due to the low permeability of the porous media (Lu and Davarpanah, 2020). Therefore, thermal injection such as CO₂ injection would be crucial to reduce the oil viscosity (Davarpanah and Mirshekari, 2019b; Mazarei et al., 2019; Davarpanah and Mirshekari, 2019c; Davarpanah et al., 2019a; Daryayehsalameh et al., 2021). It can help the crude oil be more mobilized through porous media and improve the oil production rate (Alvarado and Manrique, 2010; Hu et al., 2020d; Amann-Hildenbr et al., 2012; Huang and Ge, 2020; Davarpanah and Mirshekari, 2018a). Surfactant-assisted gas drainage (SAGD) and water alternating gas injection (WAG) are two applicable EOR techniques as they can provide two tasks in particular circumstances (Ebadi et al., 2019). SAG can be used as a wettability alteration and reduce the oil viscosity used as a hybrid method. Thereby, it can provide better results than implementing special techniques (Ampomah et al., 2016; Wang et al., 2020; Ranaee et al., 2019; Ren et al., 2019). Chamoli (2015) proposed a fuzzy model by FTOPSIS and FAHP to predict the performance of roughened V channel. He considered friction factor ratio, Nusselt number, and thermohydraulic parameters as performance defining attributes (Chamoli, 2015). Davarpanah et al. (2019) developed a fuzzy model to investigate the crucial factors on the hydraulic fracturing techniques and which parameter has been more effective in hydraulic fracturing performances (Davarpanah et al., 2019c).

Due to the importance of multi-criteria decision-making methods in solving complex issues and complex issues, these techniques would be preferable in selecting optimum EOR techniques. This method is based on the specialist decision and their experiences due to the crucial criteria that impact the oil recovery factor. FTOPSIS and FAHP were used in this study to select the optimum EOR method that can be applied in field applications.

2. Methods

The process of multi-criteria decision-making is schematically depicted in Fig. 1. The criteria and functions are depicted in Table 1.

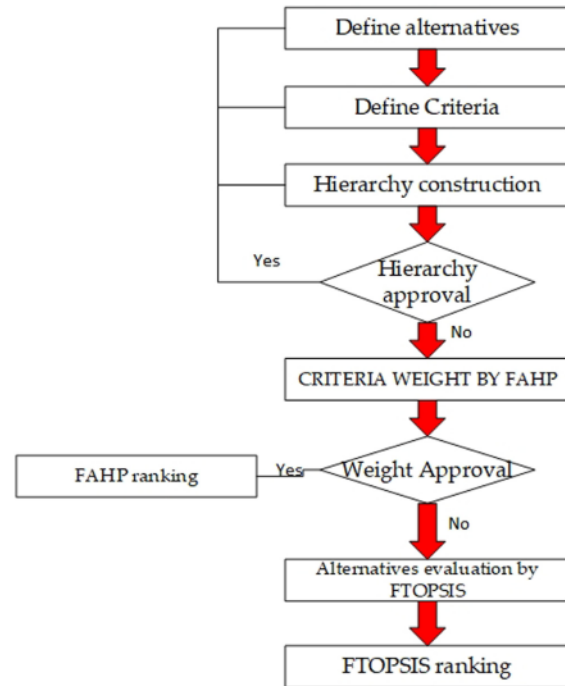


Fig. 1. Schematic of multi-criteria decision making.

Table 2
The procedure of FTOPSIS method.

Step	Description
1	The alternatives and criteria were defined firstly to create the decision matrix. Criteria and alternatives are defined as i and j , respectively. It is calculated via Eq. (1).
2	Ideal (F^+) and non-ideal (F^-) parameters were defined to solve the issues. It is calculated via Eqs. (2) and (3).
3	Ideal (S^+) and non-ideal (S^-) solutions were defined to solve the issues. It is calculated via Eqs. (4) and (5).
4	Relative closeness (C^+) is calculated via equation six, and then the enhanced oil recovery methods were prioritized.

2.1. (FTOPSIS) fuzzy technique for order preference by similarity to the ideal solution method

FTOPSIS is one of the applicable methods that can be a decisive attribute factor to solve multi-decision-making issues provided and improved by Hwang and Yoon. They improved this method to implement as the substitution for the ELECTRE (ELimination Et Choix Traduisant la REalité) method (Davarpanah et al., 2019c; Abasi et al., 2015, 2020). Regarding the complexity and dependency of reservoir characteristics in enhanced oil recovery techniques and determine the efficient method before any field application, FTOPSIS is one of the applicable techniques instead of numerical and analytical models. The process of this method is sequentially explained in Table 2 (Heravi et al., 2017; Khojastehmehr et al., 2019).

The decision matrix is created via Eq. (1).

$$r_{ij} = \frac{X_{ij}}{\sqrt{\sum_{i=1}^m X_{ij}^2}} \quad (1)$$

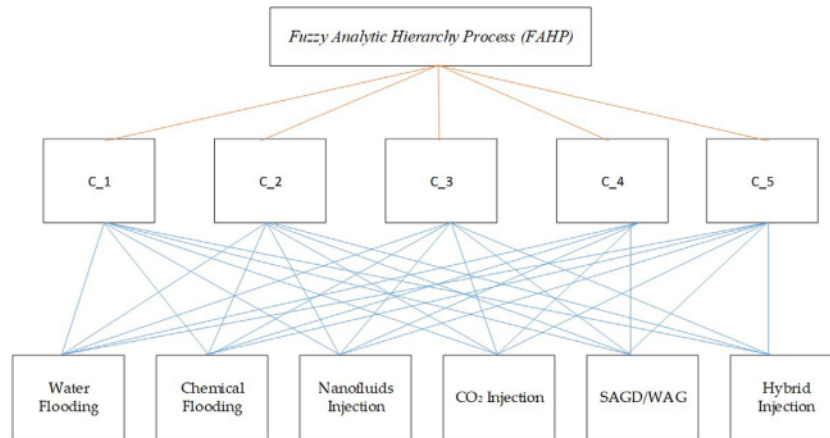


Fig. 2. Schematic hierarchy structure.

Table 3
The procedure of FAHP method.

Step	Description
1	The structure of the hierarchy procedure should be designed to identify the criteria and functions and how they are related together. Functions and criteria are explicitly defined in Table 1. The hierarchy structure is schematically depicted in Fig. 2.
2	Fuzzy pairing matrixes were defined as Eq. (7).
3	The solutions parameter is calculated as Eq. (8).
4	Criteria weights are calculated from Eq. (9).
5	Triangular fuzzy numbers were defined and categorized.

Table 4
Triangular fuzzy numbers Linguistic terms to compare attributes.

Triangular fuzzy numbers	Definition
(1,1,1)	Just equal
(1/2,1,3/2)	Equally important
(1,3/2,2)	Weakly important
(3/2,2,5/2)	Moderately important
(2,5/2,3)	Strongly important
(5/2,3,7/2)	Important

The ideal and non-ideal parameters were calculated accordingly as following equations.

$$F^- = \left\{ \left(\min_i v_{ij} | j \in J \right), \left(\max_i v_{ij} | j \in J \right) | i = 1, 2, \dots, m \right\}$$

$$= \{v_1^-, v_2^-, \dots, v_j^-, \dots, v_n^-\} \quad (2)$$

$$F^+ = \left\{ \left(\max_i v_{ij} | j \in J \right), \left(\min_i v_{ij} | j \in J \right) | i = 1, 2, \dots, m \right\}$$

Table 5
Fuzzy comparison matrixes for influential criteria in FTOPSIS method.

Criteria	Reservoir heterogeneity	Reservoir pressure	Reservoir temperature	Crude oil API	Brine salinity
Reservoir heterogeneity	(1, 1, 1)	(3, 5, 7)	($\frac{1}{9}$, $\frac{1}{7}$, $\frac{1}{5}$)	($\frac{1}{7}$, $\frac{1}{5}$, $\frac{1}{3}$)	($\frac{1}{5}$, $\frac{1}{3}$, 1)
Reservoir pressure	($\frac{1}{7}$, $\frac{1}{5}$, $\frac{1}{3}$)	(1, 1, 1)	($\frac{1}{5}$, $\frac{1}{3}$, 1)	(1, 1, 1)	(1, 3, 5)
Reservoir temperature	(5, 7, 9)	(1, 3, 5)	(1, 1, 1)	(1, 3, 5)	(3, 5, 7)
Crude oil type (API)	(3, 5, 7)	(1, 1, 1)	($\frac{1}{5}$, $\frac{1}{3}$, 1)	(1, 1, 1)	(1, 3, 5)
Brine salinity	(1, 3, 5)	($\frac{1}{5}$, $\frac{1}{3}$, 1)	($\frac{1}{7}$, $\frac{1}{5}$, $\frac{1}{3}$)	($\frac{1}{5}$, $\frac{1}{3}$, 1)	(1, 1, 1)

Table 6
Fuzzy technique for order preference by the similarity of ideal solution parameters in FTOPSIS method.

i	S_i^+	S_i^-	C_i^+
1	0.0768	0.2016	0.7241
2	0.1247	0.09361	0.4288
3	0.1153	0.09417	0.4496
4	0.1026	0.1834	0.6413
5	0.1174	0.1762	0.6001
6	0.2389	0.1084	0.3121

$$= \{v_1^*, v_2^*, \dots, v_j^*, \dots, v_n^*\} \quad (3)$$

The ideal and non-ideal solutions were calculated accordingly as following equations.

$$S_i^- = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^-)^2} \quad i = \text{from } 1 \text{ to } m \quad (4)$$

$$S_i^+ = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^+)^2} \quad i = \text{from } 1 \text{ to } m \quad (5)$$

$$C_i^+ = \frac{S_i^-}{S_i^- + S_i^+} \quad 0 < C_i^+ < 1 \quad (6)$$

2.2. FAHP (Fuzzy analytic hierarchy process)

This method is one of the appropriate and useful decision-making criteria methods, which firstly defined by Sun (2010) and Rostamzadeh et al. (2011) to identify the multi-criteria decision-making issues by providing appropriate prioritization for the problem solutions (Rostamzadeh and Sofian, 2011; Sun, 2010).

Table 7

The efficiency of the FTOPSIS technique to evaluate the enhanced oil recovery methods.

Rank	EOR schemes	Normalized weight (%)
6	Water flooding	19
5	Chemical flooding	38
4	Nanofluids injection	45
3	CO ₂ injection	56
2	SAGD/WAG	65
1	Hybrid injection	74

Decision-makers can use it to finalize the incomplete issues. The procedure of FAHP is explained in Table 3 in more detail.

The hierarchy structure is schematically depicted in Fig. 2. Fuzzy pairing matrix is defined via Eq. (7) by the consideration of a fuzzy number of

$$\tilde{a}_{ij} = \begin{cases} 1 & i = j \\ \tilde{1}, \tilde{3}, \tilde{5}, \tilde{7}, \tilde{9} \text{ or } \tilde{1}^{-1}, \tilde{3}^{-1}, \tilde{5}^{-1}, \tilde{7}^{-1}, \tilde{9}^{-1} & i \neq j \end{cases}$$

$$\tilde{A} = \begin{bmatrix} 1 & \cdots & \tilde{a}_{1n} \\ \vdots & \ddots & \vdots \\ \tilde{a}_{n1} & \cdots & 1 \end{bmatrix} \quad (7)$$

Then, the solutions parameter is calculated from the following equation;

$$S_i = \sum_{j=1}^m M_{gi}^j \otimes \left[\sum_{i=1}^n \sum_{j=1}^m M_{gi}^j \right]^{-1} \quad (8)$$

Finally, fuzzy triangular numbers were defined and categorized.

$$\tilde{w} = (d(A_1), d(A_2), \dots, d(A_n))^T \quad (9)$$

It is statistically depicted in Table 4.

3. Results

3.1. Fuzzy technique for order preference by the similarity of an ideal solution (FTOPSIS)

To be more precise about the applicability of enhanced oil recovery techniques, the following criteria should be done appropriately before selecting the best method. First, the decision

matrix should be normalized and weighted to determine the idealization of the solutions. In the next step, the ideal decision matrix has been chosen to order the enhanced method preferences. Finally, the most and the least applicable enhanced oil recovery methods have been prioritized to evaluate the efficiency of fuzzy technique for order preference by the similarity of an ideal solution. Fuzzy pairing matrices for influential criteria are statistically depicted in Table 5.

Ideal (S_i^+) and non-ideal (S_i^-) solutions and its mixture (C_i^+) is statistically depicted in Table 6.

In this stage, the efficiency of the FTOPSIS technique is evaluated by ranking the enhanced oil recovery methods regarding the normalized weight for each method. It is statistically depicted in Table 7.

According to the results of the FTOPSIS method (Table 7), hybrid injection is considered the preferable method for oil recovery enhancement. Hybrid injectivity scenarios contained the simultaneous or sequential injection of thermal and chemical enhanced oil recovery methods. It has a normalized weight of 74%. In the following steps, SAGD/WAG and CO₂ methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 65% and 56%, respectively. Water flooding is considered the least efficient technique that cannot be preferred for secondary and tertiary enhanced oil recovery methods. Its normalized weight is about 19%. Chemically enhanced oil recovery techniques are ranked in the middle of the decision criteria making in FTOPSIS methods related to the reservoir heterogeneity or high costs of these techniques, which cannot be profitable for petroleum industries.

3.2. Fuzzy analytical hierarchy process

To be more accurate about the applicability of enhanced oil recovery techniques, the following criteria should be done appropriately before selecting the best method. First, the decision matrix should be normalized and weighted to determine the idealization of the solutions. In the next step, the ideal decision matrix has been chosen to order the enhanced method preferences for each criterion separately to distinguish each criterion's influential viability. Finally, the most and the least applicable enhanced oil recovery methods have been prioritized to evaluate the efficiency of fuzzy technique for order preference by the

Table 8

Fuzzy comparison matrixes for reservoir heterogeneity criteria in FAHP method.

EOR schemes	Water flooding	Chemical flooding	Nanofluids injection	CO ₂ injection	SAGD/WAG	Hybrid injection
Water flooding	(1, 1, 1)	(3, 5, 7)	(1, 3, 5)	(1, 3, 5)	($\frac{1}{3}, \frac{1}{5}, 1$)	($\frac{1}{5}, \frac{1}{3}, 1$)
Chemical flooding	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	(1, 1, 1)	($\frac{1}{5}, \frac{1}{3}, 1$)	($\frac{1}{5}, \frac{1}{3}, 1$)	($\frac{1}{9}, \frac{1}{7}, \frac{1}{5}$)	(5, 7, 9)
Nanofluids injection	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 3, 5)	(1, 1, 1)	($\frac{1}{5}, \frac{1}{3}, 1$)	($\frac{1}{9}, \frac{1}{7}, \frac{1}{5}$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)
CO ₂ injection	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 3, 5)	(1, 3, 5)	(1, 1, 1)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)
SAGD/WAG	(1, 3, 5)	(5, 7, 9)	(5, 7, 9)	(3, 5, 7)	(1, 1, 1)	(1, 3, 5)
Hybrid injection	(1, 3, 5)	($\frac{1}{9}, \frac{1}{7}, \frac{1}{5}$)	(3, 5, 7)	(3, 5, 7)	($\frac{1}{3}, \frac{1}{5}, 1$)	(1, 1, 1)

Table 9

Fuzzy comparison matrixes for reservoir pressure criteria in FAHP method.

EOR schemes	Water flooding	Chemical flooding	Nanofluids injection	CO ₂ injection	SAGD/WAG	Hybrid injection
Water flooding	(1, 1, 1)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	($\frac{1}{9}, \frac{1}{7}, \frac{1}{5}$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	(1, 3, 5)
Chemical flooding	(3, 5, 7)	(1, 1, 1)	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 1, 1)	(1, 3, 5)	($\frac{1}{5}, \frac{1}{3}, 1$)
Nanofluids injection	(5, 7, 9)	(1, 3, 5)	(1, 1, 1)	(1, 3, 5)	(3, 5, 7)	(3, 5, 7)
CO ₂ injection	(3, 5, 7)	(1, 1, 1)	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 1, 1)	(1, 3, 5)	(1, 3, 5)
SAGD/WAG	(3, 5, 7)	($\frac{1}{5}, \frac{1}{3}, 1$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 1, 1)	(3, 5, 7)
Hybrid injection	($\frac{1}{5}, \frac{1}{3}, 1$)	(1, 3, 5)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	($\frac{1}{5}, \frac{1}{3}, 1$)	($\frac{1}{7}, \frac{1}{5}, \frac{1}{3}$)	(1, 1, 1)

Table 10
Fuzzy comparison matrixes for reservoir temperature criteria in the FAHP method.

EOR schemes	Water flooding	Chemical flooding	Nanofluids injection	CO ₂ injection	SAGD/WAG	Hybrid injection
Water flooding	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{7}, \frac{1}{5})$	$(\frac{1}{11}, \frac{1}{9}, \frac{1}{7})$	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	(3, 5, 7)	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$
Chemical flooding	(5, 7, 9)	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)	(1, 3, 5)	(1, 3, 5)
Nanofluids injection	(7, 9, 11)	(1, 3, 5)	(1, 1, 1)	(1, 3, 5)	(3, 5, 7)	(1, 3, 5)
CO ₂ injection	(3, 5, 7)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)	(1, 3, 5)	(1, 3, 5)
SAGD/WAG	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)	(3, 5, 7)
Hybrid injection	(3, 5, 7)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{3}, \frac{1}{5}, 1)$	(1, 1, 1)

Table 11
Fuzzy comparison matrixes for crude oil type (API) criteria in the FAHP method.

EOR schemes	Water flooding	Chemical flooding	Nanofluids injection	CO ₂ injection	SAGD/WAG	Hybrid injection
Water flooding	(1, 1, 1)	(3, 5, 7)	(5, 7, 9)	(1, 3, 5)	(1, 3, 5)	(1, 3, 5)
Chemical flooding	$(\frac{1}{5}, \frac{1}{3}, \frac{1}{5})$	(1, 1, 1)	(1, 3, 5)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$
Nanofluids injection	$(\frac{1}{9}, \frac{1}{7}, \frac{1}{5})$	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	$(\frac{1}{5}, \frac{1}{3}, 1)$
CO ₂ injection	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(1, 3, 5)	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$
SAGD/WAG	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(3, 5, 7)	(1, 3, 5)	(1, 1, 1)	(1, 3, 5)
Hybrid injection	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(1, 3, 5)	(1, 3, 5)	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)

Table 12
Fuzzy comparison matrixes for brine salinity criteria in FAHP method.

EOR schemes	Water flooding	Chemical flooding	Nanofluids injection	CO ₂ injection	SAGD/WAG	Hybrid injection
Water flooding	(1, 1, 1)	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	(5, 7, 9)	(1, 3, 5)	(1, 3, 5)	(1, 3, 5)
Chemical flooding	(3, 5, 7)	(1, 1, 1)	(1, 3, 5)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$
Nanofluids injection	$(\frac{1}{9}, \frac{1}{7}, \frac{1}{5})$	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{7}, \frac{1}{5}, \frac{1}{3})$	$(\frac{1}{5}, \frac{1}{3}, 1)$
CO ₂ injection	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(1, 3, 5)	(1, 1, 1)	$(\frac{1}{5}, \frac{1}{3}, 1)$	$(\frac{1}{5}, \frac{1}{3}, 1)$
SAGD/WAG	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(3, 5, 7)	(1, 3, 5)	(1, 1, 1)	(1, 3, 5)
Hybrid injection	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 3, 5)	(1, 3, 5)	(1, 3, 5)	$(\frac{1}{5}, \frac{1}{3}, 1)$	(1, 1, 1)

similarity of an ideal solution. Fuzzy comparison matrixes for influential criteria are statistically depicted in Tables 8–12.

According to the results of the FAHP method (Table 13), hybrid injection is considered the preferable method for oil recovery enhancement. Hybrid injectivity scenarios contained the simultaneous or sequential injection of thermal and chemical enhanced oil recovery methods. It has a normalized weight of 23%. In the following steps, CO₂ and SAGD/WAG methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 19% and 14%, respectively. Water flooding is considered the least efficient technique that cannot be preferred for secondary and tertiary enhanced oil recovery methods. Its normalized weight is about 5%. Chemically enhanced oil recovery techniques are ranked in the middle of the decision criteria making in FAHP methods related to the reservoir heterogeneity or high costs of these techniques, which cannot be profitable for petroleum industries.

4. Conclusion

Due to the applicability and feasibility of enhanced oil recovery methods in petroleum industries, analytical prediction of optimum methods has always been a significant issue that should be taken into consideration. Among a wide range of enhanced oil recovery (EOR) methods, the common and most applicable methods were chosen to select the optimum EOR method. The hybrid injection is considered the preferable method for oil recovery enhancement in both FTOPSIS and FAHP methods. It has a

Table 13
The efficiency of the FAHP technique to evaluate the enhanced oil recovery methods.

Rank	EOR schemes	Normalized weight (%)
6	Water flooding	5
5	Nanofluids injection	9
4	Chemical flooding	10
3	SAGD/WAG	14
2	CO ₂ injection	19
1	Hybrid injection	23

normalized weight of 74% and 23% for FTOPSIS and FAHP, respectively. In the FTOPSIS method, SAGD/WAG and CO₂ methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 65% and 56%, respectively.

Moreover, In the FAHP method, CO₂ and SAGD/WAG methods are the second and third preferred enhanced oil recovery methods with the normalized weight of 19% and 14%, respectively. Water flooding is considered as the least efficient for both methods that cannot be preferred for secondary and tertiary enhanced oil recovery methods. Its normalized weight is about 19% and 5% for FTOPSIS and FAHP, respectively. Consequently, chemically enhanced oil recovery techniques are ranked in the middle of the decision criteria making in FTOPSIS methods related to the reservoir heterogeneity or high costs of these techniques, which cannot be profitable for petroleum industries.

Nomenclature

API	American petroleum institute
EOR	Enhanced oil recovery
FTOPSIS	Fuzzy technique for order preference by similarity to an ideal solution
FAHP	Fuzzy analytic hierarchy process
SAGD	Surfactant assisted gas drainage
WAG	Water alternative gas injection
CO ₂	Carbon dioxide
ELECTRE	ELimination Et Choix Traduisant la REalité

CRedit authorship contribution statement

Zhenzhen Wei: Methodology, Writing – original draft. **Shanyu Zhu:** Conceptualization. **Xiaodong Dai:** Investigation, Software. **Xuewu Wang:** Writing – original draft. **Lis M. Yapanto:** Conceptualization, Software. **Inzir Ramilevich Raupov:** Writing – review & editing.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgment

National Science and Technology Major Project, China (2017ZX05013-001)– Study on the production limits of different injection media in typical ultra-low permeability reservoirs.

References

- A., Ketova Yu., Bojan, B., Khizhnyak, G.P., Gladikh, E.A., Galkin, S.V., 2020. Testing the technology of pre-crosslinked polymer gel particles for limiting water inflows on filtration cores models. *Journal of Mining Institute* 241, 91–96. <http://dx.doi.org/10.31897/jpmi.2020.191>.
- Abasi, M., Razaz, M., Seifossadat, G., Moosapour, S., 2015. Presenting a New Formulation to Analyze and Determine Unbalance Voltage Produced at the Place of Load Resulting From Network and Loads Unbalance and Asymmetry of Transmission Lines in Radial Power Systems. *Majlesi Journal of Energy Management* 4 (3).
- Abasi, M., Saffarian, A., Joorabian, M., Seifossadat, S.G., 2020. Fault Location in Double-Circuit Transmission Lines Compensated by Generalized Unified Power Flow Controller (GUPFC) Based on Synchronous Current and Voltage Phasors. *IEEE Syst J.* <http://dx.doi.org/10.1109/jysyst.2020.3016910>.
- Abedini, M., Zhang, C., 2020. Performance assessment of concrete and steel material models in LS-DYNA for enhanced numerical simulation, a state of the art review. *Arch. Comput. Methods Eng.* <http://dx.doi.org/10.1007/s11831-020-09483-5>.
- Adham, S., Hussain, A., Minier-Matar, J., Janson, A., Sharma, R., 2018. Membrane applications and opportunities for water management in the oil & gas industry. *Desalination* <http://dx.doi.org/10.1016/j.desal.2018.01.030>.
- Alam, Z., Sun, L., Zhang, C., Su, Z., Samali, B., 2021. Experimental and numerical investigation on the complex behaviour of the localised seismic response in a multi-storey plan-asymmetric structure. *Struct. Infrastruct. Eng.* <http://dx.doi.org/10.1080/15732479.2020.1730914>.
- Ali, H., Soleimani, H., Yahya, N., Khodapanah, L., Sabet, M., Demiral, B.M.R., Hussain, T., Adebayo, L.L., 2020. Enhanced oil recovery by using electromagnetic-assisted nanofluids: A review. *J. Mol. Liq.* <http://dx.doi.org/10.1016/j.molliq.2020.113095>.
- Alvarado, V., Manrique, E., 2010. Enhanced oil recovery: An update review. *Energies* <http://dx.doi.org/10.3390/en3091529>.
- Amann-Hildenbr, A., Ghanizadeh, A., Krooss, B.M., 2012. Transport properties of unconventional gas systems. *Mar. Pet. Geol.* <http://dx.doi.org/10.1016/j.marpetgeo.2011.11.009>.
- Ampomah, W., Balch, R., Cather, M., Rose-Coss, D., Dai, Z., Heath, J., Dewers, T., Mozley, P., 2016. Evaluation of CO₂ storage mechanisms in CO₂ enhanced oil recovery sites: Application to morrow sandstone reservoir. *Energy Fuels* <http://dx.doi.org/10.1021/acs.energyfuels.6b01888>.
- Awan, B., Sabeen, M., Shaheen, S., Mahmood, Q., Ebadi, A., Toughani, M., 2020. Phytoextraction of zinc contaminated water by *Tagetes minuta* L. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (3), 150–158. <http://dx.doi.org/10.22034/CAJESTI.2020.03.04>.
- Bafkar, A., 2020. Kinetic and equilibrium studies of adsorptive removal of sodium-ion onto wheat straw and rice husk wastes. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (6), <http://dx.doi.org/10.22034/CAJESTI.2020.06.04>.
- Bai, B., Guo, Z., Zhou, C., Zhang, W., Zhang, J., 2021. Application of adaptive reliability importance sampling-based extended domain PSO on single mode failure in reliability engineering. *Inf. Sci. (N.Y.)* <http://dx.doi.org/10.1016/j.ins.2020.07.069>.
- Brown, J.E., King, L.R., Nelson, E.B., Ali, S.A., 1996. Use of a viscoelastic carrier fluid in frac-pack applications. In: *Proc - SPE Int Symp Form Damage Control*. <http://dx.doi.org/10.2523/31114-ms>.
- Chamoli, S., 2015. Hybrid FAHP (fuzzy analytical hierarchy process)-FTOPSIS (fuzzy technique for order preference by similarity of an ideal solution) approach for performance evaluation of the V down perforated baffle roughened rectangular channel. *Energy* 84, 432–442.
- Chen, Y., Zheng, W., Li, W., Huang, Y., 2021. Large group activity security risk assessment and risk early warning based on random forest algorithm. *Pattern Recognit. Lett.* <http://dx.doi.org/10.1016/j.patrec.2021.01.008>.
- Daryayehsalameh, B., Nabavi, M., Vaferi, B., 2021. Modeling of CO₂ capture ability of [Bmim][BF₄] ionic liquid using connectionist smart paradigms. *Environ. Technol. Innov.* <http://dx.doi.org/10.1016/j.eti.2021.101484>.
- Davarpanah, A., 2018. A feasible visual investigation for associative foam > polymer injectivity performances in the oil recovery enhancement. *Eur. Polym. J.* <http://dx.doi.org/10.1016/j.eurpolymj.2018.06.017>.
- Davarpanah, A., 2019. The feasible visual laboratory investigation of formate fluids on the rheological properties of a shale formation. *Int. J. Environ. Sci. Technol.* <http://dx.doi.org/10.1007/s13762-018-1877-6>.
- Davarpanah, A., 2020. Parametric study of polymer-nanoparticles-assisted injectivity performance for axisymmetric two-phase flow in EOR processes. *Nanomaterials* <http://dx.doi.org/10.3390/nano10091818>.
- Davarpanah, A., Mazarei, M., Mirshekari, B., 2019a. A simulation study to enhance the gas production rate by nitrogen replacement in the underground gas storage performance. *Energy Rep.* <http://dx.doi.org/10.1016/j.egy.2019.04.004>.
- Davarpanah, A., Mirshekari, B., 2018a. A simulation study to control the oil production rate of oil-rim reservoir under different injectivity scenarios. *Energy Rep.* <http://dx.doi.org/10.1016/j.egy.2018.10.011>.
- Davarpanah, A., Mirshekari, B., 2018b. Experimental study and field application of appropriate selective calculation methods in gas lift design. *Pet. Res.* <http://dx.doi.org/10.1016/j.ptirs.2018.03.005>.
- Davarpanah, A., Mirshekari, B., 2019a. A mathematical model to evaluate the polymer flooding performances. *Energy Rep.* <http://dx.doi.org/10.1016/j.egy.2019.09.061>.
- Davarpanah, A., Mirshekari, B., 2019b. Experimental investigation and mathematical modeling of gas diffusivity by carbon dioxide and methane kinetic adsorption. *Ind. Eng. Chem. Res.* <http://dx.doi.org/10.1021/acs.iecr.9b01920>.
- Davarpanah, A., Mirshekari, B., 2019c. Experimental study of CO₂ solubility on the oil recovery enhancement of heavy oil reservoirs. *J. Therm. Anal. Calorim.* <http://dx.doi.org/10.1007/s10973-019-08498-w>.
- Davarpanah, A., Mirshekari, B., 2019d. Mathematical modeling of injectivity damage with oil droplets in the waste produced water re-injection of the linear flow. *Eur. Phys. J. Plus* <http://dx.doi.org/10.1140/epjp/i2019-12546-9>.
- Davarpanah, A., Mirshekari, B., 2020. Numerical simulation and laboratory evaluation of alkali-surfactant-polymer and foam flooding. *Int. J. Environ. Sci. Technol.* <http://dx.doi.org/10.1007/s13762-019-02438-9>.
- Davarpanah, A., Mirshekari, B., Jafari Behbahani, T., Hemmati, M., 2018. Integrated production logging tools approach for convenient experimental individual layer permeability measurements in a multi-layered fractured reservoir. *J. Pet. Explor. Prod. Technol.* <http://dx.doi.org/10.1007/s13202-017-0422-3>.
- Davarpanah, A., Shirmohammadi, R., Mirshekari, B., 2019b. Experimental evaluation of polymer-enhanced foam transportation on the foam stabilization in the porous media. *Int. J. Environ. Sci. Technol.* <http://dx.doi.org/10.1007/s13762-019-02280-z>.
- Davarpanah, A., Shirmohammadi, R., Mirshekari, B., Aslani, A., 2019c. Analysis of hydraulic fracturing techniques: hybrid fuzzy approaches. *Arab. J. Geosci.* <http://dx.doi.org/10.1007/s12517-019-4567-x>.
- Ebadati, A., Akbari, E., Davarpanah, A., 2019. An experimental study of alternative hot water alternating gas injection in a fractured model. *Energy Explor. Exploit.* <http://dx.doi.org/10.1177/0144598718815247>.
- Ebadi, A., Toughani, M., Najafi, A., Babaei, M., 2020. A brief overview on current environmental issues in Iran. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (1), 1–11. <http://dx.doi.org/10.22034/CAJESTI.2020.01.08>.

- Esfandiyari, H., Haghighat Hoseini, A., Shadizadeh, S.R., Davarpanah, A., 2020a. Simultaneous evaluation of capillary pressure and wettability alteration based on the USBM and imbibition tests on carbonate minerals. *J. Pet. Sci. Eng.* <http://dx.doi.org/10.1016/j.petrol.2020.108285>.
- Esfandiyari, H., Moghani Rahimi, A., Esmailzadeh, F., Davarpanah, A., Mohammadi, A.H., 2020b. Amphiphilic and cationic surfactants for enhancing oil recovery from carbonate oil reservoirs. *J. Mol. Liq.* <http://dx.doi.org/10.1016/j.molliq.2020.114518>.
- Esfandiyari, H., Shadizadeh, S.R., Esmailzadeh, F., Davarpanah, A., 2020c. Implications of anionic and natural surfactants to measure wettability alteration in EOR processes. *Fuel* <http://dx.doi.org/10.1016/j.fuel.2020.118392>.
- Galkin, V.I., Koltyrin, A.N., 2021. Investigation of probabilistic models for forecasting the efficiency of proppant hydraulic fracturing technology. *J. Min. Inst.* <http://dx.doi.org/10.31897/PMI.2020.6.7>.
- Heravi, G., Fathi, M., Faeghi, S., 2017. Multi-criteria group decision-making method for optimal selection of sustainable industrial building options focused on petrochemical projects. *J. Cleaner Prod.* 142, 2999–3013.
- Hu, Y., Chen, Q., Feng, S., Zuo, C., 2020a. Microscopic fringe projection profilometry: A review. *Opt. Lasers Eng.* <http://dx.doi.org/10.1016/j.optlaseng.2020.106192>.
- Hu, Y., Cheng, Q., Yang, J., Zhang, L., Davarpanah, A., 2020b. A laboratory approach on the hybrid-enhanced oil recovery techniques with different saline brines in sandstone reservoirs. *Processes* <http://dx.doi.org/10.3390/pr8091051>.
- Hu, X., Li, M., Peng, C., Davarpanah, A., 2020c. Hybrid thermal-chemical enhanced oil recovery methods: An experimental study for tight reservoirs. *Symmetry (Basel)* <http://dx.doi.org/10.3390/SY12060947>.
- Hu, X., Xie, J., Cai, W., Wang, R., Davarpanah, A., 2020d. Thermodynamic effects of cycling carbon dioxide injectivity in shale reservoirs. *J. Pet. Sci. Eng.* <http://dx.doi.org/10.1016/j.petrol.2020.107717>.
- Huang, K., Ge, S., 2020. The anti-CXCL4 antibody depletes CD4(+)/CD25(+)/FOXP3(+) regulatory T cells in CD4+ T cells from chronic osteomyelitis patients by the STAT5 pathway. *Ann. Cardiothorac. Surg.* <http://dx.doi.org/10.21037/apm-20-166>.
- Huang, W.Y., Wang, G.Q., Li, W.H., et al., 2020a. Porous ligand creates new reaction route: Bifunctional single-atom palladium catalyst for selective distannylation of terminal alkynes. *Chemosphere* <http://dx.doi.org/10.1016/j.chempr.2020.06.020>.
- Huang, C., Zheng, Y., Lin, W., Shi, Y., Huang, G., Yong, Q., 2020b. Removal of fermentation inhibitors from pre-hydrolysis liquor using polystyrene divinylbenzene resin. *Biotechnol. Biofuels* <http://dx.doi.org/10.1186/s13068-020-01828-3>.
- Jalali Sarvestani, M., Charehjou, P., 2021. Fullerene (C20) as a potential adsorbent and sensor for the removal and detection of picric acid contaminant: DFT Studies. *Central Asian Journal of Environmental Science and Technology Innovation* 2 (1), <http://dx.doi.org/10.22034/CAJESTI.2021.01.02>.
- Jia, K., Feng, Q., Davarpanah, A., 2021. Effect of anionic and non-anionic surfactants on the adsorption density. *Pet. Sci. Technol.* <http://dx.doi.org/10.1080/10916466.2021.1893331>.
- Jiang, Q., Shao, F., Lin, W., Gu, K., Jiang, G., Sun, H., 2018. Optimizing multistage discriminative dictionaries for blind image quality assessment. *IEEE Trans. Multimed.* <http://dx.doi.org/10.1109/TMM.2017.2763321>.
- Kazemi, A., Yang, S., 2019. Atomistic study of the effect of magnesium dopants on the strength of nanocrystalline aluminum. *JOM* <http://dx.doi.org/10.1007/s11837-019-03373-3>.
- Kazemi, A., Yang, S., 2021. Effects of magnesium dopants on grain boundary migration in aluminum-magnesium alloys. *Comput. Mater. Sci.* <http://dx.doi.org/10.1016/j.commatsci.2020.110130>.
- Khanamiri, H.H., Torsæter, O., Stensen, J.A., 2015. Experimental study of low salinity and optimal salinity surfactant injection. In: *Eur 2015*. <http://dx.doi.org/10.2118/174367-ms>.
- Khojastehmehr, M., Madani, M., Daryasafar, A., 2019. Screening of enhanced oil recovery techniques for Iranian oil reservoirs using TOPSIS algorithm. *Energy Rep.* 5, 529–544.
- Korolev, M., Rogachev, M., Tananykhin, D., 2020. Regulation of filtration characteristics of highly watered terrigenous formations using complex chemical compositions based on surfactants. *J. Appl. Eng. Sci.* <http://dx.doi.org/10.5937/jaes18-24542>.
- Lin, W., Xing, S., Jin, Y., Lu, X., Huang, C., Yong, Q., 2020. Insight into understanding the performance of deep eutectic solvent pretreatment on improving enzymatic digestibility of bamboo residues. *Bioresour. Technol.* <http://dx.doi.org/10.1016/j.biortech.2020.123163>.
- Liu, C., Deng, X., Liu, J., Peng, T., Yang, S., Zheng, Z., 2020. Dynamic response of saddle membrane structure under hail impact. *Eng. Struct.* <http://dx.doi.org/10.1016/j.engstruct.2020.110597>.
- Lotfollahi, M., Varavei, A., Delshad, M., Farajzadeh, R., Pope, G.A., 2015. A four-phase flow model to simulate chemical EOR with gas. In: *Soc Pet Eng - SPE Reserv Simul Symp 2015*. <http://dx.doi.org/10.2118/173322-ms>.
- Lu, W., Davarpanah, A., 2020. An experimental investigation to consider thermal methods efficiency on oil recovery enhancement. *Heat Transf.* <http://dx.doi.org/10.1002/htj.21762>.
- Ma, X., Zhang, K., Zhang, L., Yao, C., Yao, J., Wang, H., Jian, W., Yan, Y., 2021. Data-driven niching differential evolution with adaptive parameters control for history matching and uncertainty quantification. *SPE J.* <http://dx.doi.org/10.2118/205014-pa>.
- Maghzi, A., Mohebbi, A., Kharat, R., Ghazanfari, M.H., 2013. An experimental investigation of silica nanoparticles effect on the rheological behavior of polyacrylamide solution to enhance heavy oil recovery. *Pet. Sci. Technol.* <http://dx.doi.org/10.1080/10916466.2010.518191>.
- Maina, Y., Kyari, B., Jimme, M., 2020. Impact of household fuel expenditure on the environment: the quest for sustainable energy in Nigeria. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (2), 109–118. <http://dx.doi.org/10.22034/CAJESTI.2020.02.06>.
- Mandal, A., 2015. Chemical flood enhanced oil recovery: A review. *Int. J. Oil Gas Coal Technol.* <http://dx.doi.org/10.1504/IJOGCT.2015.069001>.
- Mao, Q.-F., Shang-Guan, Z.-F., Chen, H.-L., Huang, K., 2019. Immunoregulatory role of IL-2/STAT5/CD4+CD25+Foxp3 Treg pathway in the pathogenesis of chronic osteomyelitis. *Ann. Transl. Med.* <http://dx.doi.org/10.21037/atm.2019.07.45>.
- Mazarei, M., Davarpanah, A., Ebadati, A., Mirshekari, B., 2019. The feasibility analysis of underground gas storage during an integration of improved condensate recovery processes. *J. Pet. Explor. Prod. Technol.* <http://dx.doi.org/10.1007/s13202-018-0470-3>.
- Menad, N.A., Noureddine, Z., Hemmati-Sarapardeh, A., Shamshirband, S., Mosavi, A., Wing, Chau K., 2019. Modeling temperature dependency of oil - water relative permeability in thermal enhanced oil recovery processes using group method of data handling and gene expression programming. *Eng. Appl. Comput. Fluid Mech.* <http://dx.doi.org/10.1080/19942060.2019.1639549>.
- Nesic, S., Zolotukhin, A., Mitrovic, V., Govedarica, D., Davarpanah, A., 2020. An analytical model to predict the effects of suspended solids in injected water on the oil displacement efficiency during waterflooding. *Processes* <http://dx.doi.org/10.3390/PR8060659>.
- Nnaemeka, A., 2020. Environmental pollution and associated health hazards to host communities (Case study: Niger delta region of Nigeria). *Central Asian Journal of Environmental Science and Technology Innovation* 1 (1), 30–42. <http://dx.doi.org/10.22034/CAJESTI.2020.01.04>.
- Nwankwo, C., Gobo, E.A., Israel-Cookey, C., Abere, A.S., 2020. Effects of hazardous waste discharge from the activities of oil and gas companies in Nigeria. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (2), 119–129. <http://dx.doi.org/10.22034/CAJESTI.2020.02.07>.
- Palyanitsina, A., Sukhikh, A., 2020. Peculiarities of assessing the reservoir properties of clayish reservoirs depending on the water of reservoir pressure maintenance system properties. *J. Appl. Eng. Sci.* <http://dx.doi.org/10.5937/jaes18-24544>.
- Pan, F., Zhang, Z., Zhang, X., Davarpanah, A., 2020. Impact of anionic and cationic surfactants interfacial tension on the oil recovery enhancement. *Powder Technol.* <http://dx.doi.org/10.1016/j.powtec.2020.06.033>.
- Pande, K.K., Orr, F.M., 1994. Effect of viscous crossflow on miscibility development in a two-layer flow system: part I - ternary vaporizing gas drives. *SPE Adv. Technol. Ser.* <http://dx.doi.org/10.2118/19668>.
- Qayyum, S., Khan, I., Meng, K., Zhao, Y., Peng, C., 2020. A review on remediation technologies for heavy metals contaminated soil. *Central Asian Journal of Environmental Science and Technology Innovation* 1 (1), 21–29. <http://dx.doi.org/10.22034/CAJESTI.2020.01.03>.
- Rabbani, E., Davarpanah, A., Memariani, M., 2018. An experimental study of acidizing operation performances on the wellbore productivity index enhancement. *J. Pet. Explor. Prod. Technol.* <http://dx.doi.org/10.1007/s13202-018-0441-8>.
- Ranaee, E., Inzoli, F., Riva, M., Guadagnini, A., 2019. Hysteresis effects of three-phase relative permeabilities on black-oil reservoir simulation under WAG injection protocols. *J. Pet. Sci. Eng.* <http://dx.doi.org/10.1016/j.petrol.2019.01.044>.
- Ren, B., Male, F., Wang, Y., Baqués, V., Duncan, I., Lake, L., 2019. Oil saturation in residual oil zones and its effect on CO2 wAG injection strategies. In: *Proc. - SPE Annu. Tech. Conf. Exhib.*
- Rogachev, M.K., Mukhametshin, V.V., Kuleshova, L.S., 2019. Improving the efficiency of using resource base of liquid hydrocarbons in Jurassic deposits of western Siberia. *J. Min. Inst.* <http://dx.doi.org/10.31897/PMI.2019.6.711>.
- Rostamzadeh, R., Sofian, S., 2011. Prioritizing effective 7Ms to improve production systems performance using fuzzy AHP and fuzzy TOPSIS (case study). *Expert Syst. Appl.* 38, 5166e77.
- Sabukevich, V.S., Podoprigrora, D.G., Shagiakhmetov, A.M., 2020. Rationale for selection of an oil field optimal development system in the eastern part of the pechora sea and its calculation. *Period. Tche Quim.*
- Salahi, M., Johnson, S.J., Liang, J.T., 2008. Mechanistic study of wettability alteration using surfactants with applications in naturally fractured reservoirs. *Langmuir* <http://dx.doi.org/10.1021/la802464>.
- Sepahvand, T., Etemad, V., Matinzade, M., Shirvany, A., 2021. Symbiosis of AMF with growth modulation and antioxidant capacity of Caucasian Hackberry (*Celtis Caucasica* L.) seedlings under drought stress. 2 (1), <http://dx.doi.org/10.22034/CAJESTI.2021.01.03>.

- Shokry, A.F., Tawfik, O.M., 2010. Acid stimulation results of arab carbonate reservoirs in offshore field, U.A.E.: 10 years of review, how to prepare the future challenges linked to stimulation. In: Soc Pet Eng - 14th Abu Dhabi Int Pet Exhib Conf 2010, ADIPEC 2010. <http://dx.doi.org/10.2118/138357-ms>.
- Sie, C.Y., Nguyen, Q.P., 2020. Pore-scale study of non-aqueous foam for improving hydrocarbon miscible flooding in water sensitive tight oil formations. In: SPE/AAPG/SEG Unconv Resour Technol Conf 2020, URTEC 2020. <http://dx.doi.org/10.15530/urtec-2019-955>.
- Sun, C.C., 2010. A performance evaluation model by integrating fuzzy AHP and fuzzy TOPSIS methods. *Expert Syst. Appl.* 37, 7745e54.
- Sun, M., Lowry, G.V., Gregory, K.B., 2013. Selective oxidation of bromide in wastewater brines from hydraulic fracturing. *Water Res.* <http://dx.doi.org/10.1016/j.watres.2013.04.041>.
- Sun, S., Zhou, M., Lu, W., Davarpanah, A., 2020. Application of symmetry law in numerical modeling of hydraulic fracturing by finite element method. *Symmetry (Basel)* <http://dx.doi.org/10.3390/sym12071122>.
- Valizadeh, K., Farahbakhsh, S., Bateni, A., Zargarian, A., Davarpanah, A., Alizadeh, A., Zarei, M., 2019. A parametric study to simulate the non-Newtonian turbulent flow in spiral tubes. *Energy Sci. Eng.* <http://dx.doi.org/10.1002/ese3.514>.
- Wang, L., He, Y., Wang, Q., Liu, M., Jin, X., 2020. Multiphase flow characteristics and EOR mechanism of immiscible CO₂ water-alternating-gas injection after continuous CO₂ injection: A micro-scale visual investigation. *Fuel* <http://dx.doi.org/10.1016/j.fuel.2020.118689>.
- Xue, X., Zhang, K., Tan, K.C., Feng, L., Wang, J., Chen, G., Zhao, X., Zhang, L., Yao, J., 2020. Affine transformation-enhanced multifactorial optimization for heterogeneous problems. *IEEE Trans. Cybern.* <http://dx.doi.org/10.1109/TCYB.2020.3036393>.
- Yang, S., Li, Z., Yan, K., Zhang, X., Xu, Z., Liu, W., Liu, Z., Liu, H., 2021. Removing and recycling mercury from scrubbing solution produced in wet nonferrous metal smelting flue gas purification process. *J. Environ. Sci. (China)* <http://dx.doi.org/10.1016/j.jes.2020.10.013>.
- Yang, M., Sowmya, A., 2015. An underwater color image quality evaluation metric. *IEEE Trans. Image Process.* <http://dx.doi.org/10.1109/TIP.2015.2491020>.
- Yang, Y., Yao, J., Wang, C., Gao, Y., Zhang, Q., An, S., Song, W., 2015. New pore space characterization method of shale matrix formation by considering organic and inorganic pores. *J. Nat. Gas Sci. Eng.* <http://dx.doi.org/10.1016/j.jngse.2015.08.017>.
- Zhang, C., Abedini, M., Mehrmashhadi, J., 2020a. Development of pressure-impulse models and residual capacity assessment of RC columns using high fidelity Arbitrary Lagrangian-Eulerian simulation. *Eng. Struct.* <http://dx.doi.org/10.1016/j.engstruct.2020.111219>.
- Zhang, J., Chen, Q., Sun, Jiasong, Tian, L., Zuo, C., 2019a. On a universal solution to the transport-of-intensity equation. *arXiv*. <https://doi.org/10.1364/ol.391823>.
- Zhang, C., Gholipour, G., Mousavi, A.A., 2020b. State-of-the-art review on responses of RC structures subjected to lateral impact loads. *Arch. Comput. Methods Eng.* <http://dx.doi.org/10.1007/s11831-020-09467-5>.
- Zhang, J., Sun, J., Chen, Q., Zuo, C., 2019b. Resolution analysis in a lens-free on-chip digital holographic microscope. *arXiv*. <https://doi.org/10.1109/tci.2020.2964247>.
- Zhang, K., Zhang, J., Ma, X., Yao, C., Zhang, L., Yang, Y., Wang, J., Yao, J., Zhao, H., 2021. History matching of naturally fractured reservoirs using a deep sparse autoencoder. *SPE J.* <http://dx.doi.org/10.2118/205340-pa>.
- Zheng, Y., Yu, Y., Lin, W., Jin, Y., Yong, Q., Huang, C., 2021a. Enhancing the enzymatic digestibility of bamboo residues by biphasic phenoxylethanol-acid pretreatment. *Bioresour. Technol.* <http://dx.doi.org/10.1016/j.biortech.2021.124691>.
- Zheng, L., Yu, P., Zhang, Y., Wang, P., Yan, W., Guo, B., Huang, C., Jiang, Q., 2021b. Evaluating the bio-application of biomacromolecule of lignin-carbohydrate complexes (LCC) from wheat straw in bone metabolism via ROS scavenging. *Int. J. Biol. Macromol.* <http://dx.doi.org/10.1016/j.ijbiomac.2021.01.103>.
- Zhu, L., Kong, L., Zhang, C., 2020a. Numerical study on hysteretic behaviour of horizontal-connection and energy-dissipation structures developed for prefabricated shear walls. *Appl. Sci.* <http://dx.doi.org/10.3390/app10041240>.
- Zhu, M., Yu, L., Zhang, X., Davarpanah, A., 2020b. Application of implicit pressure-explicit saturation method to predict filtrated mud saturation impact on the hydrocarbon reservoirs formation damage. *Mathematics* <http://dx.doi.org/10.3390/math8071057>.
- Zoback, M.D., 2007. Reservoir geomechanics. *Reserv. Geomech.* <http://dx.doi.org/10.1017/CBO9780511586477>.
- Zuo, C., Chen, Q., Tian, L., Waller, L., Asundi, A., 2015. Transport of intensity phase retrieval and computational imaging for partially coherent fields: The phase space perspective. *Opt. Lasers Eng.* <http://dx.doi.org/10.1016/j.optlaseng.2015.03.006>.
- Zuo, C., Sun, J., Li, J., Zhang, J., Asundi, A., Chen, Q., 2017. High-resolution transport-of-intensity quantitative phase microscopy with annular illumination. *Sci. Rep.* <http://dx.doi.org/10.1038/s41598-017-06837-1>.

Multi-criteria decision making approaches to select appropriate enhanced oil recovery techniques in petroleum industries

ORIGINALITY REPORT

9%

SIMILARITY INDEX

11%

INTERNET SOURCES

9%

PUBLICATIONS

6%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

3%

★ eprints.gla.ac.uk

Internet Source

Exclude quotes On

Exclude bibliography On

Exclude matches < 1%